

## RAPORT EFICIENTA SOLARA


### **SOLAR VID HT 33-300** **SELECTIVE SYSTEM VID 300 + LUNA 3 SYSTEM HT 1.330 MP** **SOLAR VID 30 + PREMIUM HT 33-300**

1 x AR30

Total Gross Surface Area: 4.24 m<sup>2</sup>

Azimuth: 0°

Incl: 45°

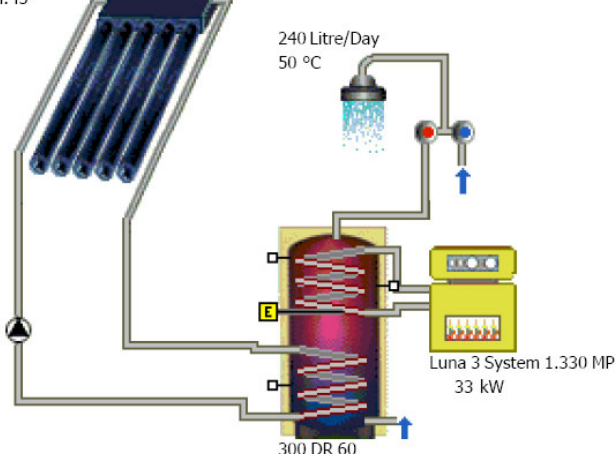

#### System Components

##### Collector Loop

|                                  |                     |
|----------------------------------|---------------------|
| Manufacturer:                    | Baxi                |
| Type:                            | AR30                |
| Number:                          | 1.00                |
| Total Gross Surface Area:        | 4.24 m <sup>2</sup> |
| Total Active Solar Surface Area: | 3.02 m <sup>2</sup> |
| Tilt Angle:                      | 45 °                |
| Azimuth:                         | 0 °                 |

##### Bivalent (Twin Coil) DHW Tank incl. Heating Element (6 kW)

|               |           |
|---------------|-----------|
| Manufacturer: | Baxi      |
| Type:         | 300 DR 60 |
| Volume:       | 300 l     |

##### Auxiliary Heating

|                 |                        |
|-----------------|------------------------|
| Manufacturer:   | Baxi                   |
| Type:           | Luna 3 System 1.330 MP |
| Nominal Output: | 33 kW                  |

#### Basic Data

##### Climate File

|                                |             |
|--------------------------------|-------------|
| Location:                      | Bucuresti   |
| Climate Data Record:           | BUCHAREST   |
| Total Annual Global Radiation: | 1412.52 kWh |
| Latitude:                      | 44.5 °      |
| Longitude:                     | -26.22 °    |

##### Domestic Hot Water

|                            |                                |
|----------------------------|--------------------------------|
| Average Daily Consumption: | 240 l                          |
| Desired Temperature:       | 50 °C                          |
| Load Profile:              | Detached House (evening max)   |
| Cold Water Temperature:    | February: 8 °C / August: 12 °C |


#### Results of Annual Simulation

|                                     |                     |                             |
|-------------------------------------|---------------------|-----------------------------|
| Installed Collector Power:          | 2.97 kW             |                             |
| Installed Gross Solar Surface Area: | 4.24 m <sup>2</sup> |                             |
| Collector Surface Area Irradiation: | 4.68 MWh            | 1,550.02 kWh/m <sup>2</sup> |
| Energy Produced by Collectors:      | 2,742.83 kWh        | 908.22 kWh/m <sup>2</sup>   |
| Energy Produced by Collector Loop:  | 2,403.52 kWh        | 795.87 kWh/m <sup>2</sup>   |


|                                |             |
|--------------------------------|-------------|
| DHW Heating Energy Supply:     | 4.08 MWh    |
| Solar Contribution to DHW:     | 2403.52 kWh |
| Energy from Auxiliary Heating: | 2071.68 kWh |

|                                      |                      |
|--------------------------------------|----------------------|
| Natural Gas (H) Savings:             | 287.9 m <sup>3</sup> |
| CO2 Emissions Avoided:               | 609.12 kg            |
| DHW Solar Fraction:                  | 53.7 %               |
| Fractional Energy Saving (EN 12976): | 55.4 %               |
| System Efficiency:                   | 51.3 %               |

#### Solar Energy Consumption as Percentage of Total Consumption

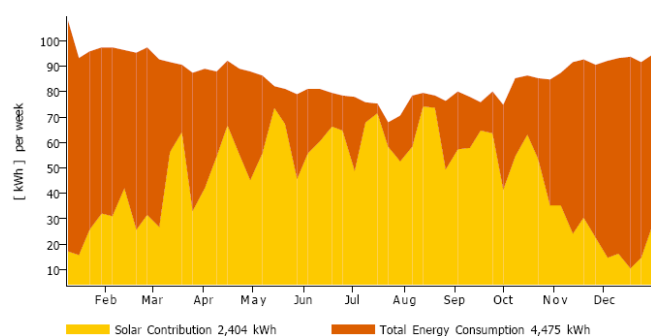

#### Daily Maximum Collector Temperature

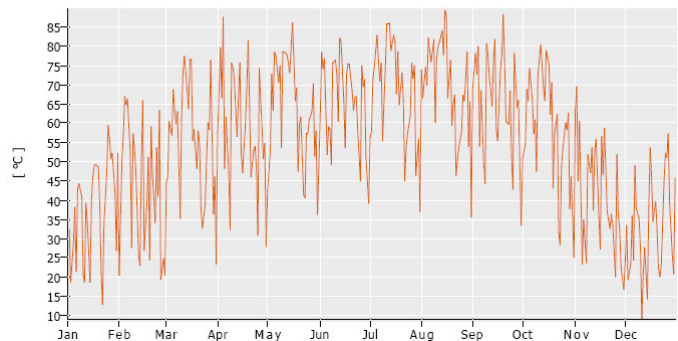

Aceste calcule au fost efectuate cu ajutorul programului T-SOL Pro 4.5 - software de simulare pentru sisteme termice de încălzire ce folosesc energia solara. Rezultatele sunt determinate in baza unui model matematic de calcul. Randamentul real se poate abate de la aceste valori, datorita fluctuatilor climatice, modului de exploatare sau altori factori externi. Schema de mai sus nu reprezinta si nu poate înlocui un proiect tehnic de executie al sistemului solar.